



# technos C

The versatile radio transmitter with a large 5" color display and numerous valuable features and functions.




Quality in Control.

# technos C



## Technical data

|                           |  |                         |                          |
|---------------------------|--|-------------------------|--------------------------|
| Radio transmitter         | technos C  |                         |                          |
| Combined with             | FSE 510 / 511 / 516 / 524, FSE 726 / 727 / 736 / 737 / 776 / 777 radiobus®, FSE 810  |                         |                          |
| Control concepts          | Point-to-point operation, catch-release, combined operation (tandem, trio, quattro), hoist / trolley pre-selection; cable option   |                         |                          |
| Operating elements        | Up to 3 joysticks or up to 6 linear levers; combination of push buttons, toggle switches, rotary switches (maintained / spring-return) and other operating elements; a total of 7 one-step push buttons on the sides; radiomatic® iCON for display navigation; 8 push buttons located on the sides of the display for navigation and for quick access to pre-defined functions; <i>optional</i> : joysticks with integrated button; z-axis switches for the simultaneous control of 3 drives |                         |                          |
| Control functions         | Up to 32 control functions (on / off); up to 8 analog functions for joysticks / linear levers; up to 4 additional analog functions, e. g. for potentiometers; number of control functions expandable by radiobus® modules  |                         |                          |
| Indication                | LED / acoustic signal / transmitter vibration / display: operating status, battery status  |                         |                          |
| Safety                    | E-STOP: PL d category 3 according to EN ISO 13849-1:2015<br>Protection from unauthorized use: activation via HBC start sequence or merlin® TUC<br>Auto Power Off: automatic deactivation of the transmitter after 15 min without command input<br>Auto Movement Off: automatic deactivation of movement functions after 5 min without command input  |                         |                          |
| Enhanced safety functions | radiomatic® shock-off / zero-g / inclination switch, front panel lighting; <i>optional</i> : access control with merlin® TUC, radiomatic® infrakey, micro / orthogonal drive, two-step enabling switch, radiomatic® touch-to-activate (joystick version only), flashlight, shut-down on implausible control commands   |                         |                          |
| Feedback to the operator  | Data, information and warnings via 5" color TFT display; <i>optional</i> : radiomatic® photon = feedback of video signals to the 5" color TFT display; information and warnings via 16 LEDs and / or transmitter vibration; number of LEDs expandable by radiobus® modules   |                         |                          |
| Service concept           | radiomatic® iLOG, radiomatic® ADCON, merlin® TMC (Teach Mode Card) for teaching of hydraulic functions   |                         |                          |
| Frequency ranges          | ISM bands  | Channel spacing         | Radiated power           |
|                           | country-specific use:<br>405 – 475 MHz<br>865 – 870 MHz  | 12,5 / 25 kHz<br>25 kHz | max. 10 mW<br>max. 10 mW |
|                           | 902 – 928 MHz  | 75 kHz                  | max. 70 mW               |
|                           | country-independent use:<br>2,4 GHz: 2402 – 2480 MHz   | 1 MHz                   | max. 100 mW              |
|                           | country-specific use:<br>DECT: 1790 – 1930 MHz   | 1.728 MHz               | max. 250 mW              |
| Frequency management      | Fixed frequency, radiomatic® AFS, radiomatic® AFM, Adaptive Frequency Hopping, DECT  |                         |                          |
| Antenna                   | Internal; <i>optional</i> : focus antennas for demanding radio environments  |                         |                          |
| Battery technology        | Rechargeable Li-ion exchange battery with capacity gauge via LEDs; continuous operating time: typically 18 hours   |                         |                          |
| Charging time             | < 8 h (typ.)   |                         |                          |
| Housing material          | Plastic (PA6 GF30)   |                         |                          |
| Weight                    | 2.7 kg (6.0 lb.)   |                         |                          |
| Operating temperature     | -20 °C ... +70 °C (-4 °F ... 158 °F)   |                         |                          |
| Protection class          | IP 65  |                         |                          |

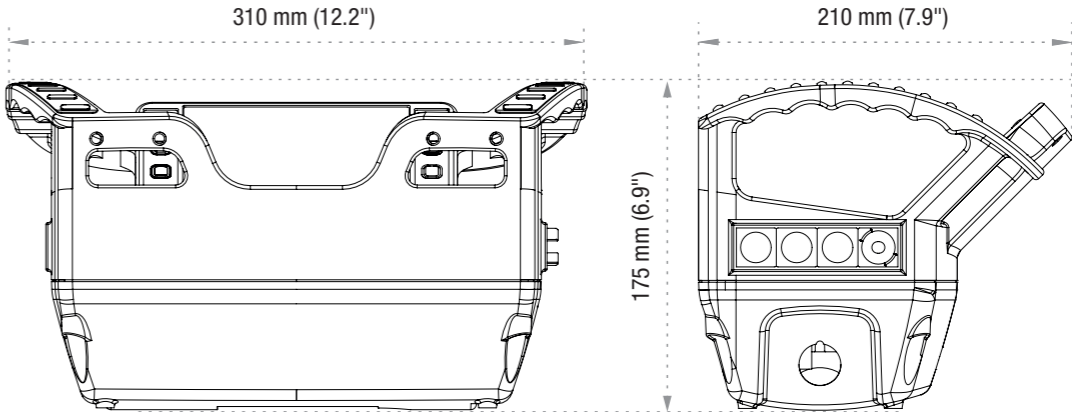

© 2022 HBC-radiomatic GmbH | PL Technos\_C | 5/1/22 | Specifications and design subject to change without notice! No part of this document may be reproduced in any manner whatsoever without the expressed written permission of HBC-radiomatic GmbH.



# technos C

The technos C is the perfect combination of powerful display technology with the latest HBC features in an ergonomic, handy design. This versatile all-rounder can be completely configured according to specific customer requirements and offers extended possibilities in the field of functional safety. High-performing exchangeable Li-ion batteries provide optimum power for a wide range of applications.

## Valuable features and options at a glance:



### Functionally safe commands

#### Enhanced safety functions for particular scenarios

Apart from the E-STOP, the radio control is available with added safe commands corresponding to PL d category 3 according to EN 13849-1:2015.



### merlin® TUC (Transmitter User Card)

#### Simple and safe management of access rights

merlin® TUC protects the control against unauthorized use. In addition, this card allows you to unlock or lock machine functions for each different operator.



### radiomatic® photon

#### Safe working with camera assistance

radiomatic® photon delivers live video images of up to 4 cameras to the radio control's color display. The operator is provided with a good view of the machine and working environment, even in areas with limited views or dead spots.



### Intelligent frequency management

#### First-class technologies for areas with high radio traffic

The transmitter is available with HBC's cutting-edge frequency management technologies and is, thus, the perfect choice for areas with many radio users or environments with frequently changing spectrum demands.



Clear presentation in high resolution.

Sensors for display brightness and front panel lighting.

8 buttons and radiomatic® iCON for navigation and activation of softkeys

## Feedback via 5" color display.

Safety and comfort paired with individual design.

- State-of-the-art TFT technology for first-class performance.
- Automatic adjustment of display brightness matched to the environment- integrated front panel lighting and 80° viewing angle from all directions.
- 800 x 480 pixel resolution.
- Layout and display elements can be chosen freely.
- Access to HBC's comprehensive library of commonly used symbols, images and graphics for display design.
- Intuitive HBC menu with setting options, warning messages and system information.



High-performing Li-ion exchange batteries with capacity gauge.



radiomatic® iLOG for the quick activation of a spare transmitter.



Convenient carrying with the hip belt.